


BASIC RDS/RBDS ENCODER

SmartGen 3.1 Encoder is the quick and inexpensive way to have an RDS/RBDS presence. The SmartGen 3.1 is able to transmit basic RDS information such as the Program Service name(PS), Program Identification(PI), Alternative Frequencies(AF), Program Type(PHY). Decoder Information and Music / Speech flag are also supported. USB connectivity makes it easy to program the non-volatile memory using any PC and the supplied Windows® software. After programming, the unit may be disconnected and re-installed at the transmitter site. Though it is not capable of "dynamic" messaging with song titles, SmartGen 3.1 will identify your station by format, display your station's "street name", and continuously transmit any station promo or advertising message to your listeners.

FEATURES

- Very Attractive Price
- Very Good Price-Performance Ratio
- Works with any FM exciter and stereo generator
- PS & Radio Text Scrolling Options
- Built-in dedicated 19kHz source for internal sync
- Fully Digital Synthesis of RDS signal
- Very Intuitive Windows Configuration Software
- MPX Loopthrough & Sidechain Modes
- Supports both RDS & RBDS standards
- Easy Installation and Setup
- 19" Case for high RF immunity
- USB Programming Interfaces
- Proved and reliable hardware for 24/7/365 operating
- Built-in failsafe bypass relay
- Internal or external Pilot / MPX Synchronisation

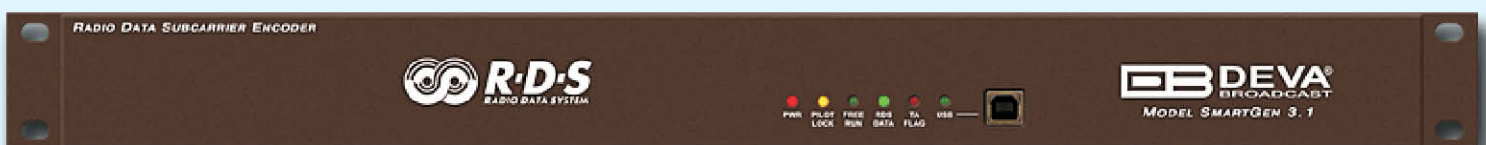

SPECIFICATIONS

RDS FEATURES

Group supported	0A, 2A
Group Sequence	Fixed
PS	1
PI	1
PTY	RDS/RBDS
AF Method A	7 AFs
RT	1 message
RT rate adjustment	Yes
TP	Yes
TA	Command
64-character Dynamic PS	Yes
Auto "parses" long messages for best text display	Yes
Scrolling by character	from 1 up to 8
Scrolling by word, Auto centering, Truncate long words	Yes

TECHNICAL SPECIFICATIONS

Chassis Dimensions	1U x 19" x 5" , 44 x 485 x 130mm
Shipping Weight	2kg
Power Supply	Internal 100-240V / 50-60 Hz
Pilot/MPX Input	Yes
MPX/RDS Output	0 to 3199 mV
Communication Port	USB
Synchronization	External (Pilot or MPX); Internal; Auto
RDS Level adjustment	with trim pot
EN50067 compliant	Yes
Side Chain Mode, Loop through mode, Bypass feature	Yes
RDS Subcarrier	100% Digitally Generated Shape
Pilot synchronization	Input Level: -50dBu to +12dBu; Frequency: 19kHz, ±3Hz
Firmware can be upgraded in the field	Yes
Operating Temperature	0°C ÷ 55°C
PI <=> CALL Calculator	Yes
Configuration	SmartGen Basic Encoder Manager
Supplied with Intuitive Software	Yes
Comes with 2-years Limited Warranty	Yes



WE NEVER SPARE EFFORTS AND RESOURCES TO TURN OUR IDEAS INTO SUCCESSFUL PRODUCTS